

# CEILING FIXTURE INSTALLATION GUIDE

Models using SC020.001 Series (LED 120V)



BESA LIGHTING

6695 Taylor Rd. Blacklick, OH 43004  
www.besalighting.com


SC020.001\_LED, Rev.1 3-18

**Caution: Turn off power to electrical box before installing**

## Use With these Models:

- Topper 12
- Paco 12

1. Carefully unpack parts. Install Mounting Bracket (A) onto Outlet box (A) and secure with Machine Screws (B).
2. Connect the house supply ground wire to the fixture ground wire and secure with wrenut provided (D).
3. Connect the electrical leads from the fixture to the house supply wires, black to black and white to white, and secure with wrenuts provided (D).
4. Install Fixture Pan (E) to Mounting Bracket (A) by aligning opening in Fixture Pan to Threaded Nipple of the Mounting Bracket and securing it in Washer (F) and Nut (G).
5. Install the Shade (H) to Threaded Nipple (I) with the Decorative Cap (J).
6. Restore power.

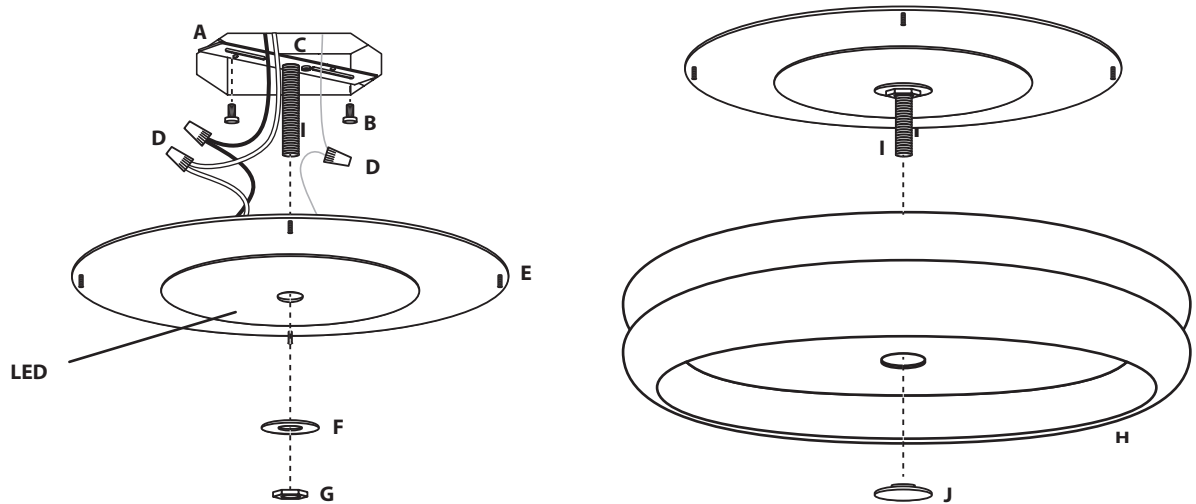

**NOTE:**  
Drawing is for instructional purposes. Actual product may vary in size and shape.

**CAUTION-RISK OF FIRE: Min 90C SUPPLY CONDUCTORS.** This fixture requires that the branch supply wires be rated: MIN 90C. Most dwellings built before 1985 have supply wire rated 60C. CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.

All electrical connections and the installation of this fixture must be in agreement with local codes, ordinances or the NEC (National Electric Code) or CEC (Canadian Electrical Code). Do not connect this fixture to an electrical system that does not provide a means for equipment grounding.