



## CANTO 5

VANITIES WALL

location:  
**DAMP**

### SPECIFICATIONS:

#### DESCRIPTION

2-4 light vanity luminaires featuring handcrafted glass.

#### LAMPING

**Standard:** 40W Low-pressure G9 Halogen, 120V, lamp included. Suitable for use in an open fixture. Dimmable with standard incandescent dimmer (not included).

**LED:** 5W Replaceable source, 120V, dimmable, 90+ CRI, 3000° K CCT, 450 lumens, 25,000 hours, lamp included.

#### DIFFUSER

Shade shall be handcrafted glass of Solare decor.  
4.0" Dia. x 4.125" H, spaced 7.875" apart on center.

#### CONSTRUCTION

Fixture utilizes metal arm assembly and stamped steel body, with plated finish. Decorative finials can be removed for downlighting applications. Decorative outlet box cover optional when not required.

#### METAL FINISH


Fixture shall be finished in Bronze, Chrome or Satin Nickel.

#### MOUNTING

Installs directly to a 4" octagonal outlet box, with 1.75" left or right offset. Canopy allows direct wiring without outlet box, where armored cable or non-metallic sheathed cable is employed, and the decorative outlet box cover is not required. Orient upward or downward, wall-mount only.

#### LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).

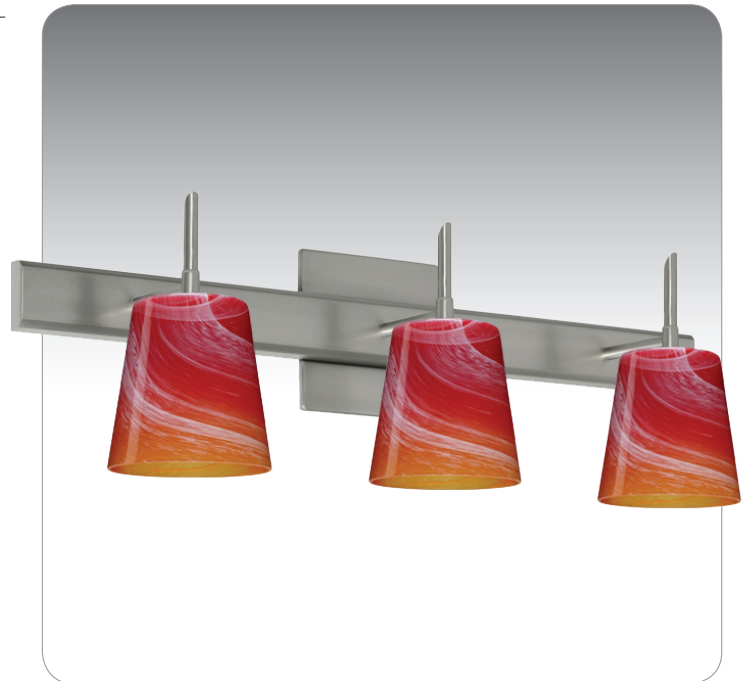

CANTO 5 SHOWN IN SOLARE (5131SL) WITH SQUARE CANOPY IN DOWNWARD ORIENTATION

**For ordering information, see next page**


All dimensions provided are nominal.  
Allowance must be made for dimensional tolerance in handcrafted glasses.

**REV 6/23**




ORDERING:

FIXTURE	GLASS OPTIONS	METAL FINISH	METAL FINISH	OPTIONS
2SW 2 Light Vanity	5131SL Solare	(blank) 40W G9 Hal	BR Bronze	SQ Square Canopy
3SW 3 Light Vanity		LED 5W LED 120V, dimmable	CR Chrome	
4SW 4 Light Vanity			SN Satin Nickel	




**Ex. 3SW-5131SL-SN**  
 Canto 5 3-Light Vanity w/ Solare Glass,  
 Satin Nickel Finish


2SW: 14.625" L

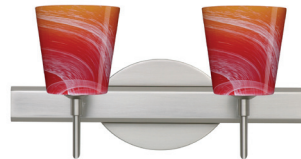

3SW: 22.5" L

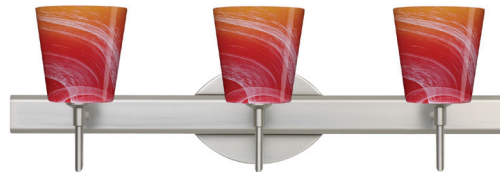

4SW: 30.375" L

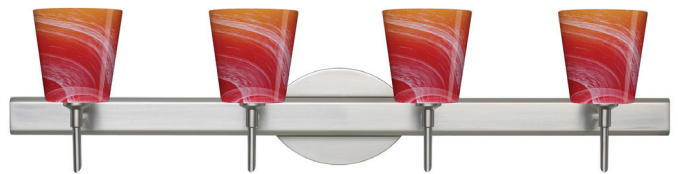

Canopy allows direct wiring without outlet box, where armored cable or non-metallic sheathed cable is employed, and the decorative outlet box cover is not required. Orient upward or downward, wall-mount only.

**Project Information:**