



# SCOPE

## 12V MINI PENDANTS

location:  
**DRY**

### SPECIFICATIONS:

#### DESCRIPTION

Low voltage mini pendant with handcrafted glass.

#### LAMPING

**Standard:** 50W Shielded Flood MR16 12V Bi-Pin lamp, lamp included. Suitable for use in an open fixture. Dimmable with ELV Dimmer.

**LED:** 5W Replaceable 12V LED MR16 with backlight, dimmable, 82+ CRI, 3000°K CCT, 300 lumens, 25,000 hours. Dimmable with ELV Dimmer.

#### DIFFUSER

Shade shall be handcrafted glass of various decors. 2.375" Dia. x 4" H

**Opening sizes:** 3x5mm.

#### CORD

Standard cord is 10' field-adjustable coaxial type with teflon jacket and decorative sleeve at the socketholder. Jacket tint coordinates with metal finish. Cords also available in 15' lengths.

#### STANDARD PENDANT (1XC, 1XT, X)

Mini pendant comes complete with either dome-style or flat-style canopy. See next page for multi light options with "X" prefix.

#### QUICK-CONNECT OPTION (XP, RXP)

Quick-Connect Jack is compatible with Besa Rail Adapter.

#### METAL FINISH



Glass retainer hardware, sleeve and Quick-Connect Jack and/or canopies are finished in either Black, Bronze or Satin Nickel.

#### MOUNTING

Installs directly to a 4" octagonal ceiling box. Suitable for sloped ceilings.

#### LABELS

UL or ETL Listed. Suitable for Dry Locations (interior use only).

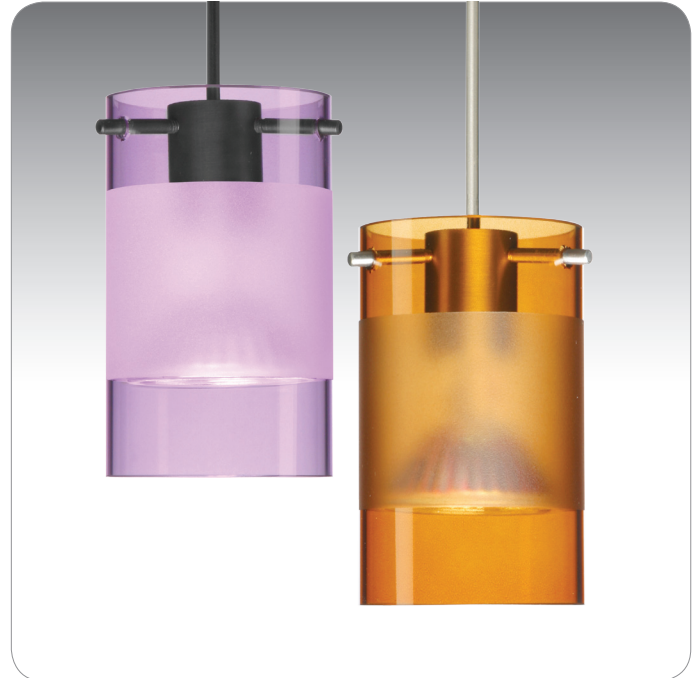

SCOPE SHOWN IN AMETHYST/FROST (6524EA) WITH BLACK FINISH & ARMAGNAC/FROST (6524EG)

6524EC  
CLEAR/FROST

6524ES  
SMOKE/FROST



**Project Information:**

**For ordering information, see next page**

All dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.

**REV 6/23**



### ORDERING:

| CONNECTION            | GLASS OPTIONS                | LAMP OPTIONS         | METAL FINISH           | OPTIONS                     |
|-----------------------|------------------------------|----------------------|------------------------|-----------------------------|
| Quick-Connect         | <b>6524EA</b> Amethyst/Frost | (blank) 50W Hal MR16 | <b>BK</b> Black        | <b>L</b> 15' cord           |
| <b>XP</b> Jack Only   | <b>6524EC</b> Clear/Frost    | <b>LED</b> 5W LED,   | <b>BR</b> Bronze       | <b>277</b> 277V             |
| <b>RXP</b> Rail-Ready | <b>6524EG</b> Armagnac/Frost | dimmmable            | <b>SN</b> Satin Nickel | <b>DIM010</b> 0-10V Dimming |
|                       | <b>6524ES</b> Smoke/Frost    |                      |                        |                             |


Pendant Fixtures

**1XC** Dome Canopy

**1XT** Flat Canopy

Multi light

**X** For Multi light Canopy



Multilight Canopies Available, see options on right.

### Ex. 1XT-6524EC-SN

Scope Mini Pendant w/ Clear/Frost Glass, Satin Nickel Finish


### QUICK-CONNECT OPTIONS:

#### XP PENDANT ELEMENT ONLY



- Pendant Shade and Cord/Socket Set
- 10' Field-adjustable braided coaxial-type cord with a teflon jacket (clear or bronze tint coordinates with metal finish)
- Quick-Connect Jack provided
- Compatible with Besa Canopies and Rail Adapter
- Black, Bronze or Satin Nickel metal finishes


#### RXP PENDANT + RAIL ADAPTER



- READY FOR RAIL**
- Pendant Shade and Cord/Socket Set, plus Rail Adapter
  - 10' Field-adjustable braided coaxial-type cord with a teflon jacket (clear or bronze tint coordinates with metal finish)
  - Quick-Connect Jack provided
  - Compatible with Besa Monorail System
  - Black, Bronze or Satin Nickel metal finishes


### FIXED PENDANT OPTIONS:

#### 1XC 1 LIGHT PENDANT, DOME CANOPY




- NO CORD CUTTING REQUIRED**
- Suitable for use on sloped ceilings
  - 1x electronic 60W dimmable 120V transformer
  - Installs to standard 4" octagonal junction box
  - Black, Bronze or Satin Nickel metal finishes

#### 1XT 1 LIGHT PENDANT, FLAT CANOPY



- Suitable for use on sloped ceilings
- 1x electronic 60W dimmable 120V transformer, fits partially in junction box
- Installs to standard 4" octagonal junction box
- Black, Bronze or Satin Nickel metal finishes

#### X 1 LIGHT PENDANT FOR MULTIPOINT CANOPIES



- Suitable for use on sloped ceilings
- 1x electronic 60W dimmable 120V transformer, fits partially in junction box
- Installs to standard 4" octagonal junction box
- Black, Bronze or Satin Nickel metal finishes

### ADDITIONAL OPTIONS:

#### 277V:


For 277V option, add an "277" to the end of the item number, i.e. 1XT-174352-SN-277.

#### 0-10V Dimming:

For 0-10V Dimming option, add an "DIM010" to the end of the item number, i.e. 1XT-174352-SN-DIM010.


### MULTIPOINT CANOPY OPTIONS:

#### T23X 3 LIGHT ROUND CANOPY




- Suitable for sloped ceilings
- Black, Bronze or Satin Nickel
- 10" Dia. shades MAX, with staggered heights
- \* For larger diameter glasses, Skyhooks are required for spacing

#### T23XL 3 LIGHT LARGE ROUND CANOPY




- Suitable for sloped ceilings
- Black, Bronze or Satin Nickel
- 16" Dia. shades MAX, with staggered heights
- \* For larger diameter glasses, Skyhooks are required for spacing

#### T26X 6 LIGHT ROUND CANOPY




- Suitable for sloped ceilings
- Black, Bronze or Satin Nickel
- 10" Dia. shades MAX, with staggered heights
- \* For larger diameter glasses, Skyhooks are required for spacing

#### T29X 9 LIGHT ROUND CANOPY




- Suitable for sloped ceilings
- Black, Bronze or Satin Nickel
- 10" Dia. shades MAX, with staggered heights
- \* For larger diameter glasses, Skyhooks are required for spacing

#### T23V 3 LIGHT BAR CANOPY

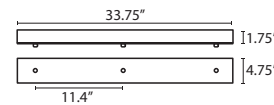


- Suitable for sloped ceilings
- Black, Bronze or Satin Nickel
- 20" Dia. shades MAX, with staggered heights
- \* For larger diameter glasses, Skyhook are required for spacing

#### T24V 4 LIGHT BAR CANOPY



- Suitable for sloped ceilings
- Black, Bronze or Satin Nickel
- 20" Dia. shades MAX, with staggered heights
- \* For larger diameter glasses, Skyhook are required for spacing

#### T27V 7 LIGHT BAR CANOPY



- Suitable for sloped ceilings
- Black, Bronze or Satin Nickel
- 20" Dia. shades MAX, with staggered heights
- \* For larger diameter glasses, Skyhook are required for spacing

### HOW TO ORDER A MULTILIGHT FIXTURE

Order your canopy with the selected 12V multi light pendants (indicated by "X" prefix) for the complete fixture:

**Example: 1x T23XL-SN (3 Light Large Round Canopy)**

**1x X-6524ES-SN (Scope Pendant in Smoke/Frost)**

**1x X-6524ES-SN (Scope Pendant in Smoke/Frost)**

**1x X-6524ES-SN (Scope Pendant in Smoke/Frost)**

### CORD LENGTH OPTIONS:

#### 15Ft. CORD LENGTH:

For longer 15' cord, add an "L" to the end of the item number, i.e. 1XT-174352-SNL.