

INSTALLATION GUIDE


Model FLX60 Flexible Feed Cable
(For use with Besa low voltage lighting systems only)
FLX60, Rev.2 2-09

IMPORTANT SAFETY INSTRUCTIONS:

- A) Read all instructions.
- B) Do not conceal or extend exposed conductors through a building wall.
- C) Do not install this system in wet locations.
- D) For low voltage exposed insulated conductor systems required by 30.1(c) do not install any part of this system less than 7 feet (2.2m) above the floor.
- E) To reduce the risk of fire and burns, do not install this lighting system where the exposed bare conductors can be shorted or contact any conductive materials.
- F) To reduce the risk of fire and overheating, make sure all connections are tight.
- G) Do not install any luminaire closer than 6 inches (15.25 cm) from any curtain, or similar combustable materials.
- H) Turn off electrical power before modifying the lighting system in any way.


A) Remove the Rail Adapter:

1. Using a Hex Wrench, loosen two set screws on the sides of the Rail Adapter located on the underside of the Power Supply Canopy
2. Carefully remove the Rail Adapter from the Power Supply Canopy, exposing the two Feed Posts.

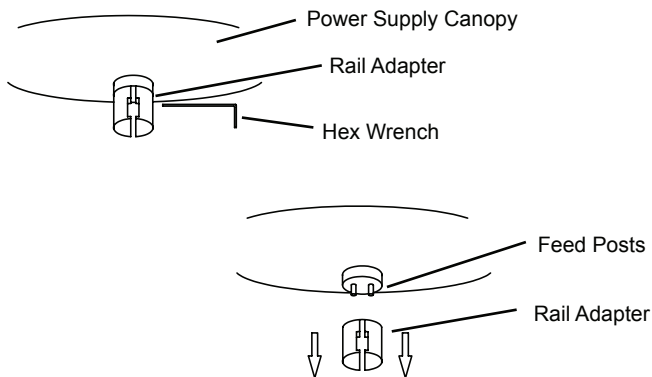


B) Install Flexible Feed Cable:

1. Using a Hex Wrench, loosen the set screws on the sides of the Flexible Feed Adapter, then install the Flexible Feed Cable and tighten.
2. Shorten the Flexible Feed Cable to the desired length.
3. Insert the Flexible Feed Cable into the Rail Adapter and the Flexible Feed Adapter onto the Feed Posts.

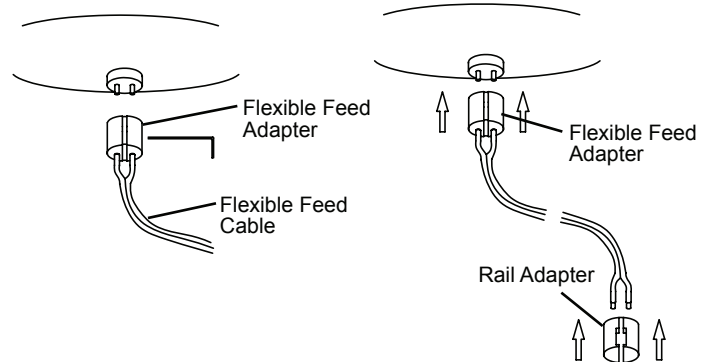


C) Secure Flexible Feed Cable:

1. Using a Hex Wrench, secure the Flexible Feed Adapter to the Power Supply Canopy.
2. Using a Hex Wrench, secure the Rail Adapter to the Flexible Power Feed.

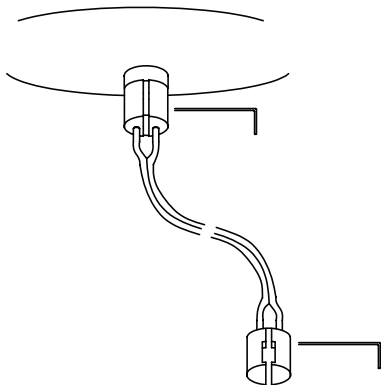

D) Installation of Monorail:

1. Loosen Set Screw on the Rail Adapter of the Canopy.
2. Raise the Monorail into the Rail Adapter, then tighten Set Screw.
3. Turn on power to system.

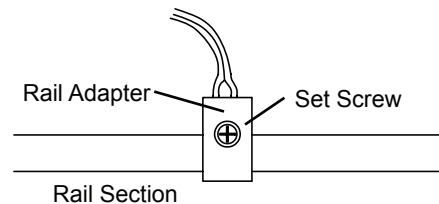

NOTE:

Operate system for 5 minutes, then verify that the connections are running cool to the touch.

SAVE THESE INSTRUCTIONS