

FRIZ

120V PENDANTS

SPECIFICATIONS:

DESCRIPTION

The Friz is an open-bottom cylinder of handcrafted European glass with a look that will stand the test of time.

LAMPING

Standard: 75W A19 120V incandescent, lamp not included. Dimmable with standard incandescent dimmer (not included).

LED: 9W Replaceable source, 120V, dimmable, 90+ CRI, 3000°K CCT, 800 lumens, 30,000 hours. Lamp included. (Standard CCT is 3000K, 3500K and 4000K are also available)

DIFFUSER

Shade shall be handcrafted glass of White Linen or Opal Glossy decors. 5" Dia. x $16"\,{\rm H}$

SUSPENSION

Cord-hung: 10' SVT-type cord, complete with 5" decorative sleeve at the socketholder. Jacket coordinates with metal finish. Plated stamped steel construction.


Stem-mount: 4 connectable stem sections (3", 6", 12" and 18" lengths) plus telescoping piece for up to 3" adjustment, 10' max. 5" Dia. canopy (with swivel) and stem sections are plated steel. Black, Bronze or Satin Nickel.

MOUNTING

Installs directly to a 4" octagonal or round ceiling box. Suitable for sloped ceilings.

LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).



FRIZOG (OPAL GLOSSY) & FRIZLN (WHITE LINEN)

Project Information:			
For ordering information, see next nage			

For ordering information, see next page


All dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses. location:



ORDERING:

ORDERING:					MULTIPU	KI CANOPI OPTI	CIND
CONNECTION -	SHADE OPTIONS -	LAMP OPTIONS	- METAL FINISH	I - OPTIONS	T33X 3 LIGH	IT ROUND CANOPY	1
Cord Fixture 1JC 1 Lt. Dome 1JT 1 Lt. Flat	FRIZLNWhite LinenFRIZOGOpal Glossy	(blank) 75W A19 Incan LED 3000K LED LED35 3500K LED	BK Black BR Bronze SN Satin	L 15' cord LW Low wattage		☐ ☐ [1.25″	(
Stem Fixture		LED40 4000K LED	Nickel	labeling	07 55	Suitable for sloped ceilings	
1TT 1 Lt. Flat		-				• Black, Bronze or Satin Ni	ckel
Multi light J For Multi light		Friz P	1JC-FRIZLI endant w/ Wh Nickel Finish	N-SN iite Linen Glass,	IT 3.1	• 10" Dia. shades MAX, with staggered heights	
Canopy						* For larger diameter glas Stemhooks are required spacing	
					T36X 6 LIGH	[1.25″	
Multilight Canopies Available, see catalog page. 11						Suitable for sceilings Size O S	e or
					0 51	• 10" Dia. shad MAX, with staggered h * For larger di glasses, Ster are required	eights iameter mhooks
PENDANT OF	PTIONS:				T38X 8 LIG	spacing	
1JT / 1JC / J (0	DRD-HUNG PEND	ANT					iitable foi ack, Bron
	y Suita - Also - Also - Also	(1JT) or Dome (1JC) Ca ws adjustment withou ption is pendant less c ppy (options to the rigi able for sloped ceiling d: 10' SVT, 5" sleeve at s available in 15' k, Bronze or Satin Nick d Sleeves are available	t cutting cord. anopy for mult ht) s cocketholder el	ŗ	0 0 0	° * Fo	" Dia. sha or larger equired fo
1TT STEM PEND			in to lengths		T33V 3 LIC	GHT BAR CANOPY	
5°	," • Includes sections, • Black, Br	t canopy, suitable for s telescoping section p . (1x 3", 1x 6", 1x 12", 1x onze or Satin Nickel al Stem Sections can b ies	lus 4 connectal 18"), 10' max		• • • • • • • • • • •	33.75" I1.75" I1.75" I4.75" GHT BAR CANOPY	• Suit • Blac • 20" * For req
ACCESSORIE	S:				·	43″	• Suit
ADDITIONAL STEM SECTIONS: CC Additional connecting stems are lf c available to increase overall length Co of a Stem Pendant, up to 10' max. me		CORD SLEEVE If concealing the Cord-hung Penc metal sleeves. Ei and may be field	e cord is desir lant, order ou ach sleeve is 1	r 0.25″ dia.	• • • • • • • • • • • • • • • • • • •	6 (4.7 6HT BAR CANOPY	• 20"
up to 3" movement T20A-SN, BK or BR T203-SN, BK or BR T203-SN, BK or BR T206-SN, BK or BR T212-SN, BK or BR T218-SN, BK or BR	t. Adj. Section 3" Section 6" Section 12" Section	T118-BK Black T118-BR Bronze T118-SN Satin N STEMHOOKS Suspension hoo	lickel ks allow cord		• 11" •	43" [1.7] (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7) (1.7	• Blac • 20" * For
LONGER CORD I Longer cord length Add an "L" to the er number, i.e. 1JC-16	of 15' available. nd of the item	be placed where for sloped ceilin multilight spacin T103BK Blac T103BR Bro	gs or for grea ng :k		Order yo (indicate	TO ORDER A MUI our canopy with the sel ed by "B" or "J" prefix) fo e: 1x T33X-SN (3 Light	ected or the co

MULTIPORT CANOPY OPTIONS FOR CORD PENDANTS

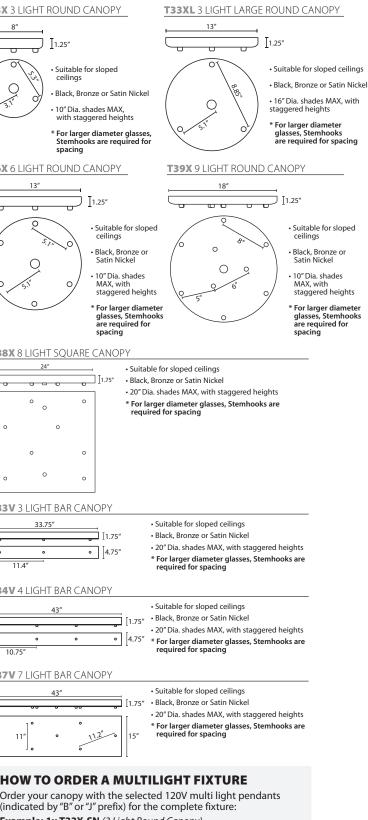

1x J-FRIZOG-SN (Friz Pendant in Opal Glossy) 1x J-FRIZOG-SN (Friz Pendant in Opal Glossy)

PENDAN

1JT / 1JC

5″ I 0.625″	Т 2.5" 10'
ΤU	ТП

1TT STEM



ACCESS

ADDITION

number, i.e. LOW WATTAGE LABELING: Incandescent fixture supplied with 16 watt relamp label. Add an "LW" to the end of the item

number, i.e. 1JC-169707-SN-LW.

T103SN

Satin Nickel

Besa Lighting Co., Inc. • 6695 Taylor Rd. • Blacklick, OH 43004 • tel 614-762-8900 • fax 614-762-8901 • www.besalighting.com

Example: 1x T33X-SN (3 Light Round Canopy)

1x J-FRIZOG-SN (Friz Pendant in Opal Glossy)