

SILK 10 / 12 / 16

FLUSH MOUNT CEILING

location:

SPECIFICATIONS:

DESCRIPTION

The Silk ceiling fixture collection is comprised of an matte etched Opal bottom diffuser accented with a black upper cap and fitter. The result is an appealing contrast created from the soothing illuminated opal against the appearance of a spun metal cap, which is actually an artistically finished portion of the glass diffuser.

LAMPING

Standard: 60W MAX E26 base A19, 120V, lamp not included. Dimmable with standard incandescent dimmer (not included).

LED: 15W Integrated source, 120V, CL dimmable, 90+ CRI, 3000°K CCT, 1500 lumens, 50,000 hours, included. (For Silk 10 only)

LED: 20W Integrated source, 120V, CL dimmable, 90+ CRI, 3000°K CCT, 2000 lumens, 50,000 hours, included. (For Silk 12 only)

LED: 30W Integrated source, 120V, CL dimmable, 90+ CRI, 3000°K CCT, 3000 lumens, 50,000 hours, included. (For Silk 16 only)

DIFFUSER

Handcrafted glass diffuser is available in various decors. **Silk 10 #SILK10:** 10" Dia. x 3.75" H **Silk 12 #SILK12:** 12.5" Dia. x 4.25" H **Silk 16 #SILK16:** 16" Dia. x 4.75" H

CONSTRUCTION

Glass diffuser is secured to fitter with three set screws. Stamped aluminum fitter is powder coated black.

MOUNTING

Installs directly to a 4" octagonal outlet box, centered on fixture. 90°C supply wire required for incandescent lamping.

LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).



SILK IN OPAL/GOLD

OPAL/BLACK




For ordering information, see next page

All dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.



ORDERING:

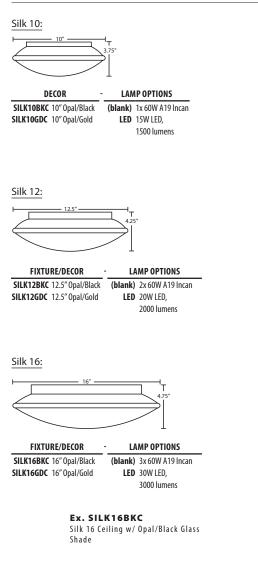

Project Information: