



NIMBUS 10 / 16

FLUSH MOUNT



Location:
DAMP

SPECIFICATIONS:

DESCRIPTION

Flush-mounted ceiling or **ADA-Compliant** wall fixture, featuring a low-profile toroid-shaped opal glass diffuser.

LAMPING

Nimbus 10: 23W integrated source, 120V, dimmable, 90+ CRI, 3000°K CCT, 2065 lumens, 25,000 hours, included.

Nimbus 16: 34W integrated source, 120V, dimmable, 90+ CRI, 3000°K CCT, 2995 lumens, 25,000 hours, included.

DIFFUSER

Handcrafted of glass in Opal Matte decor.

Nimbus 10: 9.75" Dia. x 2.25" H

Nimbus 16: 16.5" Dia. x 3" H

CONSTRUCTION

Fabricated aluminum fitter in powder coated white finish.

MOUNTING


Installs directly to a 4" octagonal outlet box, centered on fixture.

LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).




OPAL MATTE (NIMBUS1007C)

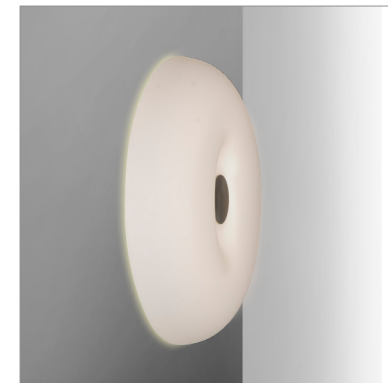


*Can be used as ADA-compliant wall sconce as shown above


Nimbus 10 Ceiling:




Nimbus 10 Wall:



Nimbus 16 Ceiling:



Nimbus 16 Wall:



Nimbus 10 Flush Mount:

FIXTURE	- LAMP OPTIONS -	METAL FINISH
NIMBUS1007C Opal Matte	LED 23W LED, 2065 lumens	BK Black BR Bronze SN Satin Nickel

Nimbus 16 Flush Mount:

FIXTURE	- LAMP OPTIONS -	METAL FINISH
NIMBUS1607C Opal Matte	LED 34W LED, 2995 lumens	BK Black BR Bronze SN Satin Nickel

Ex. NIMBUS1607C-LED-SN

Nimbus 16 Ceiling, Opal Matte Shade

Project Information:

All dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.