

SOLA 10 / 12 / 16

FLUSH MOUNT CEILING

location:

SPECIFICATIONS:

DESCRIPTION

Flush-mounted round ceiling luminaires, featuring handcrafted glass. Three sizes available.

LAMPING

Standard: 60W MAX E26 base A19, 120V, lamp not included. Dimmable with standard incandescent dimmer (not included).
LED: 15W Integrated source, 120V, CL dimmable, 90+ CRI, 3000°K CCT, 1500 lumens, 50,000 hours, included. (For Sola 10 only)
LED: 20W Integrated source, 120V, CL dimmable, 90+ CRI, 3000°K CCT, 2000 lumens, 50,000 hours, included. (For Sola 12 only)
LED: 30W Integrated source, 120V, CL dimmable, 90+ CRI, 3000°K CCT, 3000 lumens, 50,000 hours, included. (For Sola 16 only)

DIFFUSER

Handcrafted glass diffuser is available in various decors. Sola 10 #9432XX: 10" Dia. x 3.75" H Sola 12 #9431XX: 12.5" Dia. x 4.25" H Sola 16 #9430XX: 16" Dia. x 4.75" H

CONSTRUCTION

Glass diffuser is secured to fitter with three set screws. Stamped aluminum fitter is powder coated white.

MOUNTING

Installs directly to a 4" octagonal outlet box, centered on fixture. 90°C supply wire required for incandescent lamping.

LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).



SOLA CEILING SHOWN IN MARBLE

OPAL MATTE




For ordering information, see next page

All dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 10/24



ORDERING:

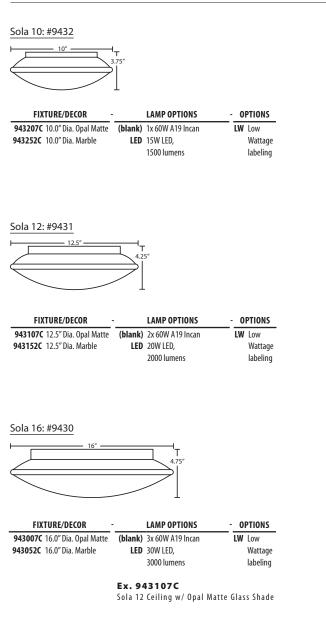

Project Information:		