



LUMA 18

FLUSH MOUNT CEILING

location:
DAMP

SPECIFICATIONS:

DESCRIPTION

Flush-mounted round ceiling luminaires, featuring handcrafted glass.

LAMPING

Standard: 60W MAX E26 base A19, 120V, lamp not included. Dimmable with standard incandescent dimmer (not included).

LED: 30W Integrated source, 120V, CL dimmable, 90+ CRI, 3000°K CCT, 3000 lumens, 50,000 hours, included.

DIFFUSER

Handcrafted glass diffuser is available in Opal Glossy/Clear decor. 17.25" Dia. x 4.75" H

CONSTRUCTION

Glass diffuser is secured to fitter with "twist & lock" bayonet action. Stamped aluminum fitter is powder coated white.

MOUNTING

Installs directly to a 4" octagonal outlet box, centered on fixture. 90°C supply wire required for incandescent lamping.

LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).




LUMA CEILING SHOWN IN OPAL GLOSSY/CLEAR



Twist and lock bayonet glass

Luma 18: #9097

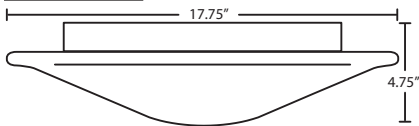

FIXTURE	DECOR	LAMP OPTIONS	OPTIONS
3CS 17.75" Dia.	909739 Opal Glossy/Clear	(blank) 3x 60W A19 Incan LED 30W LED, 3000 lumens	LW Low Wattage labeling

Ex. 3CS-909739
Luma Ceiling w/ Opal Glossy/Clear Glass Shade

Project Information:

All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.