



TITO

VANITIES WALL

location:
DAMP

SPECIFICATIONS:

DESCRIPTION

1-4 Light vanity luminaires featuring handcrafted glass.

LAMPING

Standard: 60W G9 Bi-pin socket, 120V, suitable for dimming. Lamp included.

LED: 5W Replaceable source, 120V, dimmable, 90+ CRI, 3000° K CCT, 450 lumens, 25,000 hours, lamp included.

DIFFUSER

Handcrafted glass diffuser in Opal Matte. 3.5 L x 5.125" H

CONSTRUCTION

Stamped steel body, with plated finish. Decorative outlet box cover optional when not required.

METAL FINISH


Fixture shall be finished in Chrome or Satin Nickel.

MOUNTING

Installs directly to a 4" octagonal outlet box, with 1.75" left or right offset. Canopy allows direct wiring without outlet box, where armored cable or non-metallic sheathed cable is employed, and the decorative outlet box cover is not required. Wall-mount only.


LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).

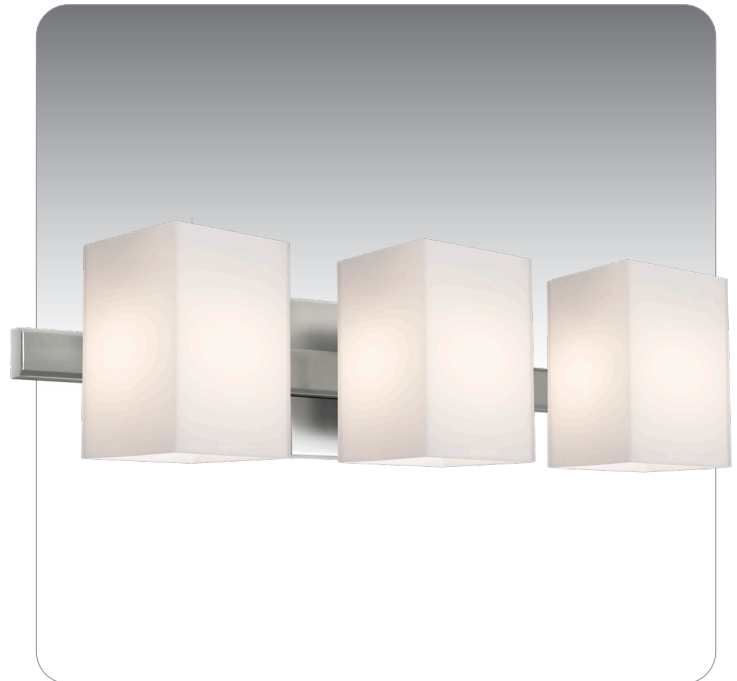


OPAL MATTE

1SW-TITO07-SN
5" L x 5.25" H x 5" D



2SW-TITO07-SN
14.625" L x 5.125" H x 5" D



3SW-TITO07-SN
22.5" L x 5.125" H x 5" D



4SW-TITO07-SN
30.375" L x 5.125" H x 5" D



ORDERING:

FIXTURE	SHADE OPTION	LAMP OPTIONS	METAL FINISH
1SW 1 Lt. Sconce	TIT007 Opal Matte	(blank) 60W G9 Socket	CR Chrome
2SW 2 Lt. Vanity		LED 5W LED	SN Satin Nickel
3SW 3 Lt. Vanity			
4SW 4 Lt. Vanity			

Ex. 2WS-TITO07-SN
Tito Vanity, Opal Matte Glass
Shade, Satin Nickel Finish

Project Information:

All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 10/24