

CIRO

VANITIES WALL



location: DAMP



DESCRIPTION

2-3 Light **ADA-compliant** vanity luminaires featuring handcrafted glass.

LAMPING

Standard: 50W G9 Bi-pin socket, 120V, suitable for dimming. Lamp included. **LED:** 5W Replaceable source, 120V, dimmable, 90+ CRI, 3000° K CCT, 450 lumens, 25,000 hours, lamp included.

DIFFUSER

Diffuser shall be handcrafted Opal Matte glass. 6.375" Dia., spaced 7.875" on center.

CONSTRUCTION

Rectangular canopy (4.75" x 5.5" H) and lampholder are stamped steel, with plated finish.

METAL FINISH


Fixture shall be finished in Satin Nickel.

MOUNTING

Installs directly to a 4" octagonal outlet box, with up to 1" offset. Orient horizontal or vertical, wall-mount only.

IARFIS

UL or ETL Listed. Suitable for Damp Locations (interior use only).

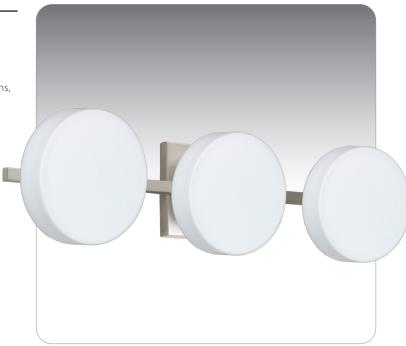

CIRO SHOWN IN OPAL MATTE (773807) IN CHROME FINISH

ORDERING:

 FIXTURE
 - SHADE OPTION
 - LAMPING OPTIONS
 - METAL FINISH

 2WS 2 Light
 773807 Opal Matte
 (blank) 50W G9 Socket
 SN Satin Nickel

 3WS 3 Light
 LED 5W LED 120V, dimmable

Ex. 3WS-773807-SN Ciro Vanity w/ Opal Matte Glass Shade, Satin Nickel Finish



Project Information:

All dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 10/24