



TAMBURO

WALL SCONCES



SPECIFICATIONS:

DESCRIPTION

Wall-mounted **ADA-compliant** sconce featuring open-ended handcrafted glass.

LAMPING

Standard: 75W E26 base A19, 120V, suitable for dimming, lamp not included. *(Incandescent dimmer is suitable for dimming, not included)*

LED: 8W LED Replaceable source 120V, CL dimmable, 90+ CRI, 3000°K CCT, 800 lumens, 30,000 hours, lamp included.

DIFFUSER

Diffuser shall be handcrafted glass of various decors.

CONSTRUCTION

Glass is secured to the backplate by braided wire. Rectangular backplate (nominal 4" W x 6.5" H) shall be constructed of steel, powder-coated white.

METAL FINISH



Decorative metal accents shall be in various finish options.

MOUNTING

Installs directly to a 4" octagonal outlet box. 75°C supply wire required for incandescent lamping. Top of glass is approximately 4.25" above the outlet box centerline.

LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).

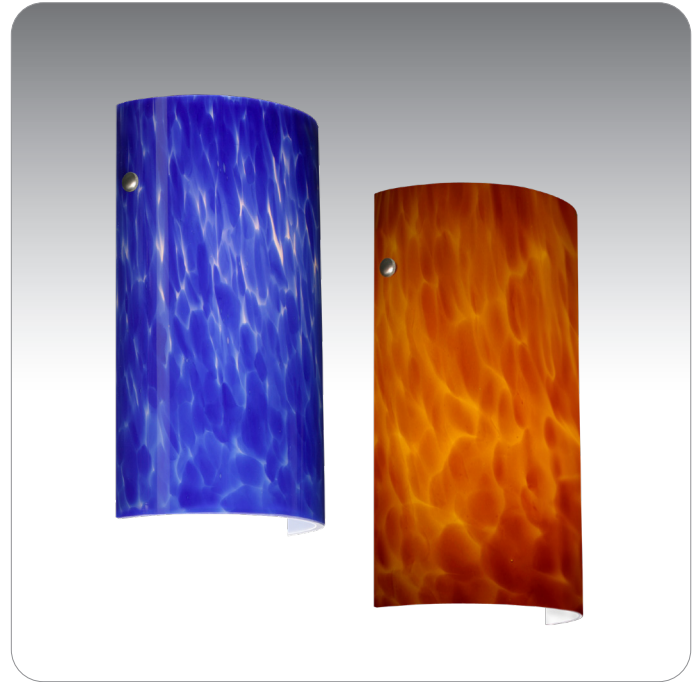


TAMBURO SHOWN IN BLUE CLOUD (704286) & AMBER CLOUD (704218)

704207
OPAL MATTE

704219
CARRERA

7042HN
HONEY

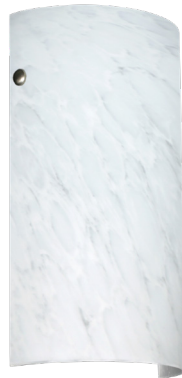

For ordering information, see next page

All dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 10/24



ORDERING:

FIXTURE/DECOR	LAMP OPTIONS	METAL FINISH	OPTIONS
704207 Opal Matte	(blank) 75W A19	BK Black	LW Low Wattage
704218 Amber Cloud	LED 8W LED 120V,	BR Bronze	labeling
704219 Carrera	dimmmable	PN Polished Nickel	
704286 Blue Cloud		SN Satin Nickel	
7042HN Honey		WH White	

Ex. 7042HN-SN
Tamburo Wall Sconce w/ Honey Glass,
Satin Nickel Finish

Project Information: