



SWIRL

MINI SCONCES WALL

location:
DAMP

SPECIFICATIONS:

DESCRIPTION

Wall-mounted sconce featuring one handcrafted glass.

LAMPING

Standard: 40W G9 Bi-pin base, 120V, lamp included. Suitable for use in an open fixture. Dimmable with standard incandescent dimmer (not included).

LED: 5W Replaceable source, 120V, dimmable, 90+ CRI, 3000° K CCT, 450 lumens, 25,000 hours, lamp included.

DIFFUSER

Shade shall be handcrafted glass of Dicro Swirl decor.
Diameter of 5.5" and height of 2.5"

CONSTRUCTION

Fixture utilizes metal arm assembly with stamped steel canopy and faceplate (5" Circle or Square), with plated finish.

METAL FINISH


Fixture shall be finished in Bronze, Chrome or Satin Nickel.

MOUNTING


Installs directly to a 4" octagonal outlet box. Wall-mount only.
Designed for uplighting, but may also be oriented downward.

LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).

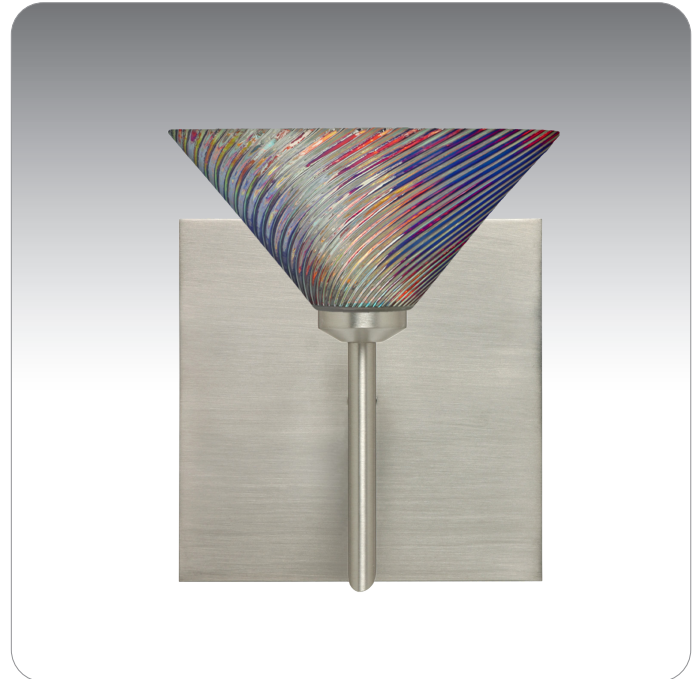

SWIRL SHOWN IN DICRO SWIRL (550493)

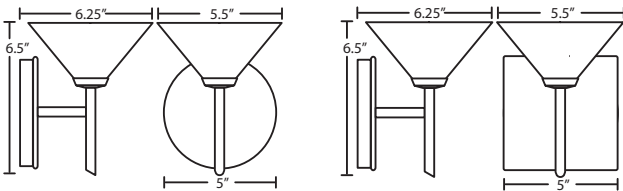

ORDERING:

| FIXTURE | - | GLASS OPTIONS | - | METAL FINISH | - | METAL FINISH | - | OPTIONS |
|------------|---|--------------------|---|---|---|---|---|---------------------|
| 1SW Sconce | - | 550493 Dicro Swirl | - | (blank) 40W G9 Socket LED 5W LED 120V, dimmable | - | BR Bronze CR Chrome SN Satin Nickel | - | SQ Square Canopy |

Ex. 1SW-550493-SN

Swirl Mini Sconce w/ Dicro Swirl Glass,
Satin Nickel Finish

Project Information:

All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 10/24