

GLASS SHADE INSTALLATION GUIDE

Model J Series - (Med. Base Pendant Set 120V)



BESA LIGHTING

6695 Taylor Rd. Blacklick, OH 43004
www.besalighting.com


Rope Pendant_Solo, Rev.1 6-16

Use With these Models:

- Solo
(SOLO)


IMPORTANT: For installation of pendants and wiring, please refer to the **Fixture Installation Guide** included with fixture canopy

1. Carefully unpack parts. Remove Mounting Plate (A) from Canopy (B), by unthreading Cap Nuts (C) from the Threaded posts (H).
2. Install the Mounting Plate (A) to the Outlet Box (D), as shown. Feed the Fixture Cord (E) through the Canopy (B) and connect House Supply Wires to Fixture Cord Conductors as follows: House Ground Wire to Green Conductor Cord, Black to Black and White to White with provided Wirenuts (F). Install Rope (G) to Canopy (A) by hooking Rope (G) to Canopy (A), then push wires and wirenuts into the Outlet Box (D).
3. Align the openings on the canopy with the Threaded Posts on the Mounting Plate. Push the Canopy (B) up over the Threaded Posts until tight to the ceiling, then secure with the two Cap Nuts (C).
4. Install lamp.

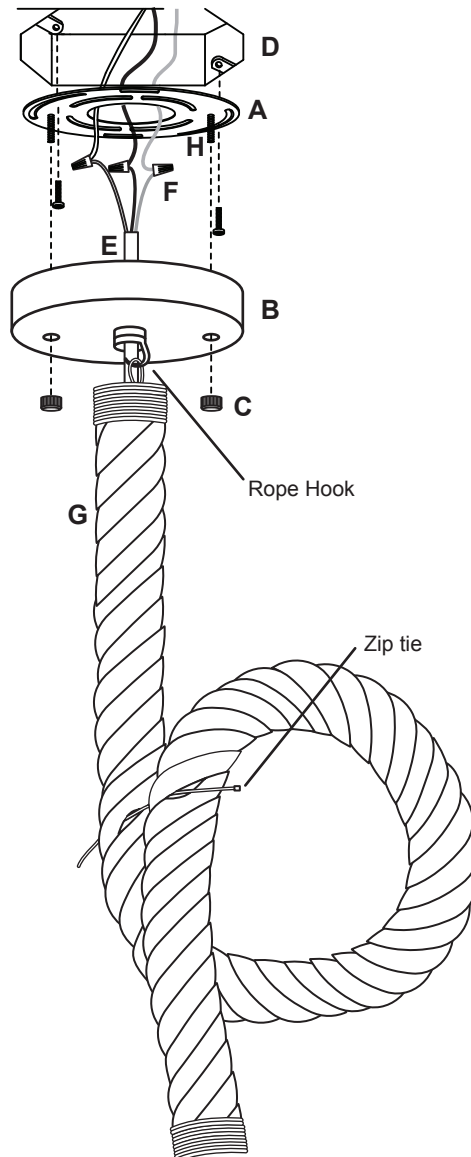

Shortening the Rope Pendant:

Loop the Rope Pendant to desired height, then insert Zip tie into intersection of the Loop. Zipped down to secure in place.

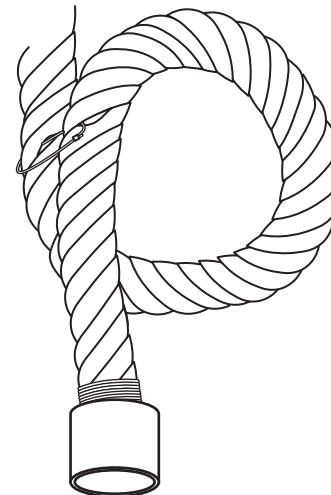

All electrical connections and the installation of this fixture must be in agreement with local codes, ordinances or the NEC (National Electric Code) or CEC (Canadian Electrical Code). Do not connect this fixture to an electrical system that does not provide a means for equipment grounding.