



# KILLIAN 26

SCONCES WALL



location:  
**DAMP**

## SPECIFICATIONS:

### DESCRIPTION

Wall-mounted **ADA-compliant** sconces featuring closed-ended handcrafted glass.

### LAMPING

**Standard:** 3x 40W G9 Halogen 120V, suitable for dimming, lamp included.

**LED:** 5W LED Replaceable source 120V, CL dimmable, 90+ CRI, 3000°K CCT, 550 lumens, 30,000 hours, lamp included.

### DIFFUSER

Diffuser shall be handcrafted Satin White glass.

### CONSTRUCTION

Steel fitter with white powder coat finishes. Glass is secured by steel set screws.

### MOUNTING


Installs directly to a 4" octagonal outlet box, centered on fixture.

75°C supply wire required for incandescent lamping.

Orient horizontal or vertical, wall-mount only.

### LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).

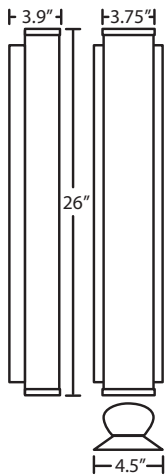

## ORDERING:

FIXTURE	LAMP OPTIONS	METAL FINISH
KILLIAN26 Satin White	(blank) 3x 40W G9 Hal LED 3x 5W LED	CR Chrome SN Satin Nickel

**Ex. KILLIAN26-SN**  
Killian 26 Wall Sconce, Opal Matte,  
Satin Nickel Finish

**Project Information:**

All dimensions provided are nominal.  
Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 12/18