



# CIRQUE

12V MINI PENDANTS

location:  
**DRY**

## SPECIFICATIONS:

### DESCRIPTION

6-light suspension pendant with metal shades on a wooden ring.

### LAMPING

**Standard:** 50W Shielded Flood MR16 12V Bi-Pin lamp, lamp included.  
Suitable for use in an open fixture. Dimmable with ELV Dimmer.

**LED:** 9W Replaceable 12V LED, dimmable, 90++ CRI, 3000°K CCT, 670 lumens, 25,000 hours. Dimmable with ELV Dimmer.

### SUSPENSION

Cords with Metal shades in various decor options on a 28" Wood Ring.

### CANOPY

6-light canopy. Plated stamped steel construction.

### MOUNTING

Installs directly to a 4" octagonal ceiling box. Suitable for sloped ceilings.

### LABELS

UL or ETL Listed. Suitable for Dry Locations (interior use only).  
Consult factory concerning lower wattage labeling for energy requirements.




CIRQUE-12V-BK  
(BLACK)



CIRQUE-12V-SN  
(SATIN NICKEL)



CIRQUE-12V-BR  
(BRONZE)

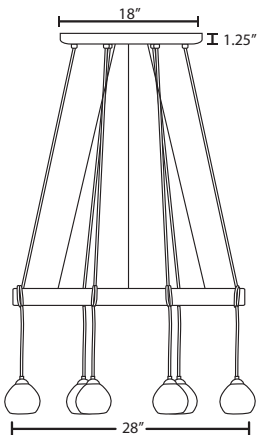

## ORDERING:

FIXTURE	TYPE	LAMP OPTIONS	METAL FINISH	OPTIONS
CIRQUE Cirque	12V 12V	(blank) 50W MR16 LED 9W LED MR16	BK Black BR Bronze SN Satin Nickel	L 15' cord 277 277V DIM010 0-10V Dimming

**Ex. CIRQUE-12V-BK**  
Cirque Suspension, 12V Type,  
Black Finish

## ADDITIONAL OPTIONS:

### 277V:

For 277V option, add an "277" to the end of the item number, i.e. 1XT-174352-SN-277.

### 0-10V Dimming:

For 0-10V Dimming option, add an "DIM010" to the end of the item number, i.e. 1XT-174352-SN-DIM010.

## CORD LENGTH OPTIONS:

### 15Ft. CORD LENGTH:

For longer 15' cord, add an "L" to the end of the item number, i.e. 1XT-174352-SNL.

### Project Information:

All dimensions provided are nominal.  
Allowance must be made for dimensional tolerance in handcrafted glasses.