



BILLOW 15

SCONCES OUTDOOR



SPECIFICATIONS:

DESCRIPTION

Wall-mounted **ADA-compliant** sconce.

LAMPING

Standard: 2x 60W A15 120V incandescent, lamp not included. Dimmable with standard incandescent dimmer (not included).

LED: 8W Replaceable LED source, 120V, dimmable, 90+ CRI, 3000°K CCT, 800 lumens, 30,000 hours, lamp included.

DIFFUSER

Diffuser shall be glass with painted sides in various decors.

CONSTRUCTION

Stamped aluminum fitter is powder coated. Glass is secured by stainless steel set screws.

MOUNTING


Installs directly to a 4" octagonal outlet box. 75°C supply wire required for incandescent lamping. Fixture is centered on the outlet box. Wall mount only.

LABELS

UL or ETL Listed. Suitable for Wet Locations (interior or exterior use).



SHOWN IN OPAL MATTE/SILVER AND OPAL MATTE/BRONZE

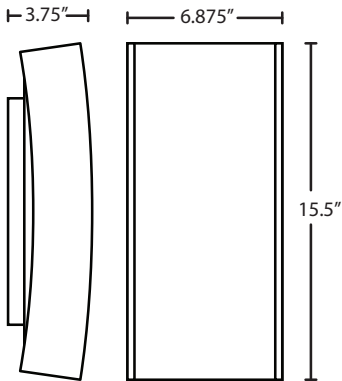

OPAL MATTE/BLACK



ORDERING:

FIXTURE	LAMP OPTIONS	FINISH
BILLOW15 Opal Matte	(blank) 2x 60 A19 Incan LED 2x 8W LED	BK Black BR Bronze SL Silver

Ex. BILLOW15-BK
Billow 15 Outdoor Sconce,
Black

Project Information:

All dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 12/18