



DIVI

VANITIES WALL



location:
DAMP

SPECIFICATIONS:

DESCRIPTION

2-3 light vanity luminaires featuring handcrafted glass.

LAMPING

Standard: 40W G9 Bi-pin base, 120V, lamp included. Suitable for use in an open fixture. Dimmable with standard incandescent dimmer (not included).

LED: 5W Replaceable source, 120V, dimmable, 90+ CRI, 3000° K CCT, 450 lumens, 25,000 hours, lamp included.

DIFFUSER

Shade shall be handcrafted glass of various decors.

Diameter of 3.375" and height of 2.625", spaced 7.875" apart on center.

CONSTRUCTION

Fixture utilizes metal arm assembly and stamped steel body, with plated finish. Decorative finials can be removed for downlighting applications. Decorative outlet box cover optional when not required.

METAL FINISH


Fixture shall be finished in Bronze or Satin Nickel.

MOUNTING

Installs directly to a 4" octagonal outlet box, with 1.75" left or right offset. Canopy allows direct wiring without outlet box, where armored cable or non-metallic sheathed cable is employed, and the decorative outlet box cover is not required. Orient upward or downward, wall-mount only.

LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).

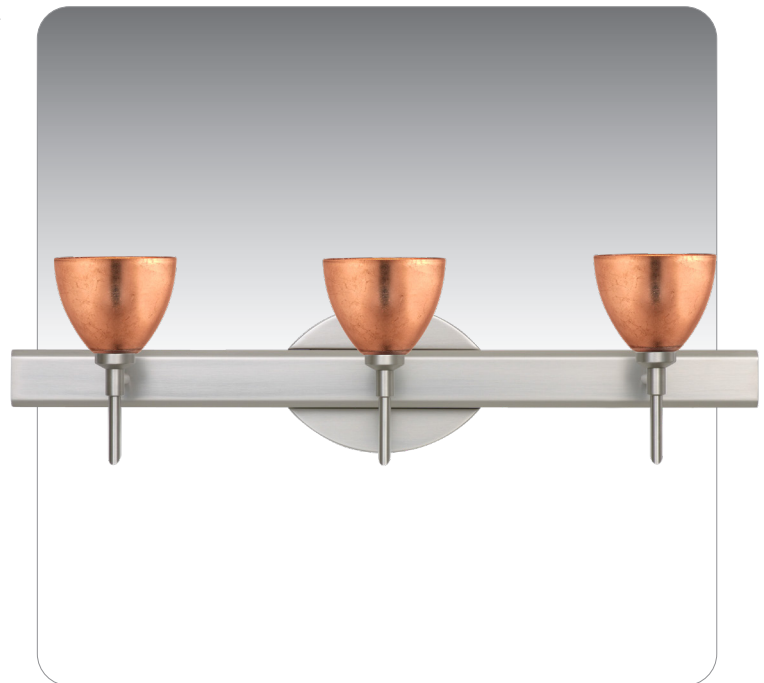

DIVI SHOWN IN COPPER FOIL (1758CF)

1758GF
GOLD FOIL

1758SF
SILVER FOIL



For ordering information, see next page

All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 10/24




ORDERING:


FIXTURE	SHADE OPTIONS	LAMP OPTIONS	METAL FINISH	OPTIONS
2SW 14.625" Vanity	1758CF Copper Foil	(blank) 40W G9 Socket	BR Bronze	SQ Square
3SW 22.5" Vanity	1758GF Gold Foil 1758SF Silver Foil	LED 5W LED 120V, dimmable	SN Satin Nickel	Canopy

Ex. 3SW-1758SF-SN
 Divi 3-Light Vanity w/Silver
 Foil Glass Shades, Satin
 Nickel Finish


**LED is replaceable
 source, 90+ CRI,
 3000°K CCT, 450
 lumens, 25,000
 hours.*



2SW: 14.625" L



3SW: 22.5" L

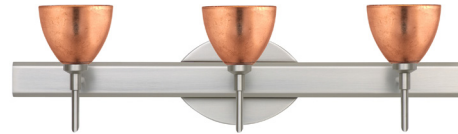

Canopy allows direct wiring without outlet box, where armored cable or non-metallic sheathed cable is employed, and the decorative outlet box cover is not required. Orient upward or downward, wall-mount only.

Project Information: