



# MISTRAL

SCONCES WALL



location:  
**DAMP**

## SPECIFICATIONS:

### DESCRIPTION

Wall-mounted **ADA-compliant** sconce featuring open-ended handcrafted glass.

### LAMPING

**Standard:** 2x 100W MAX E26 base A19, 120V, suitable for dimming, lamp not included. *(Incandescent dimmer is suitable for dimming, not included)*

**LED:** 2x 11W LED Replaceable source 120V, CL dimmable, 90+ CRI, 3000°K CCT, 1100 lumens, 30,000 hours, lamp included.

### DIFFUSER

Diffuser shall be handcrafted glass of Opal Matte decor.

### CONSTRUCTION

Glass is secured to the backplate by decorative thumbscrews. Rectangular backplate (nominal 4"W x 17.25" H) shall be constructed of steel, powder-coated white.

### METAL FINISH

Decorative metal accents shall be in various finish options.

### MOUNTING


Installs directly to a 4" octagonal outlet box. 75°C supply wire required for incandescent lamping. Top of glass is approximately 11.375" above the outlet box centerline.

### LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).



MISTRAL SHOWN IN OPAL MATTE (711207)

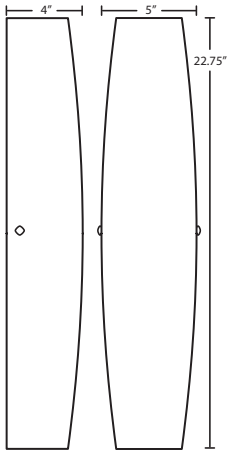

## ORDERING:

FIXTURE/DECOR	LAMP OPTIONS	METAL FINISH	OPTIONS
711207 Opal Matte	(blank) 2x 100W A19 LED 2x 11W LED 120V, dimmable	BK Black BR Bronze PN Polished Nickel SN Satin Nickel WH White	LW Low Wattage labeling

**Ex. 711207-SN**  
Mistral Wall Sconce w/ Opal Matte Glass, Satin Nickel Finish

Project Information:

All dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 10/24