



TAY TAY

VANITIES WALL

location:
DAMP

SPECIFICATIONS:

DESCRIPTION

2-4 light vanity luminaires featuring handcrafted glass.

LAMPING

Standard: 40W Low-pressure G9 Halogen, 120V, lamp included. Suitable for use in an open fixture. Dimmable with standard incandescent dimmer (not included).

LED: 5W Replaceable source, 120V, dimmable, 90+ CRI, 3000° K CCT, 450 lumens, 25,000 hours, lamp included.

DIFFUSER

Shade shall be handcrafted glass of various decors.
4.125" Dia. x 3.875" H, spaced 7.875" apart on center.

CONSTRUCTION

Fixture utilizes metal arm assembly and stamped steel body, with plated finish. Decorative finials can be removed for downlighting applications. Decorative outlet box cover optional when not required.

METAL FINISH

Fixture shall be finished in Bronze, Chrome or Satin Nickel.

MOUNTING

Installs directly to a 4" octagonal outlet box, with 1.75" left or right offset. Canopy allows direct wiring without outlet box, where armored cable or non-metallic sheathed cable is employed, and the decorative outlet box cover is not required. Orient upward or downward, wall-mount only.

LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).



TAY TAY SHOWN IN CARRERA (560519) IN DOWNWARD ORIENTATION

560507
OPAL MATE



560560
COCOON



5605HN
HONEY



5605HB
HABANERO



5605MA
MAGMA



For ordering information, see next page


All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 8/21





ORDERING:

FIXTURE	GLASS OPTIONS	METAL FINISH	METAL FINISH	OPTIONS
2SW 2 Light Vanity	560507 Opal Matte	(blank) 40W G9 Hal	BR Bronze	SQ Square
3SW 3 Light Vanity	560519 Carrera	LED 5W LED 120V, dimmable	CR Chrome	Canopy
4SW 4 Light Vanity	560560 Cocoon		SN Satin Nickel	
	5605HB Habanero			
	5605HN Honey			
	5605MA Magma			



Ex. 3SW-560519-SN
 Tay Tay 3-Light Vanity w/ Carrera Glass,
 Satin Nickel Finish

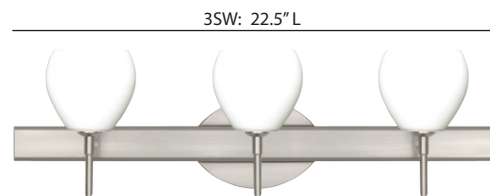

Canopy allows direct wiring without outlet box, where armored cable or non-metallic sheathed cable is employed, and the decorative outlet box cover is not required. Orient upward or downward, wall-mount only.

Project Information: