



TITO

VANITIES WALL

location:
DAMP

SPECIFICATIONS:

DESCRIPTION

1-4 Light vanity luminaires featuring handcrafted glass.

LAMPING

Standard: 60W G9 Halogen 120V, suitable for dimming, lamp included.

LED: 5W Replaceable source, 120V, dimmable, 90+ CRI, 3000° K CCT, 450 lumens, 25,000 hours, lamp included.

DIFFUSER

Handcrafted glass diffuser in Opal Matte. 3.5 L x 5.125" H

CONSTRUCTION

Stamped steel body, with plated finish. Decorative outlet box cover optional when not required.

METAL FINISH


Fixture shall be finished in Bronze, Chrome or Satin Nickel.

MOUNTING

Installs directly to a 4" octagonal outlet box, with 1.75" left or right offset. Canopy allows direct wiring without outlet box, where armored cable or non-metallic sheathed cable is employed, and the decorative outlet box cover is not required. Wall-mount only.


LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).

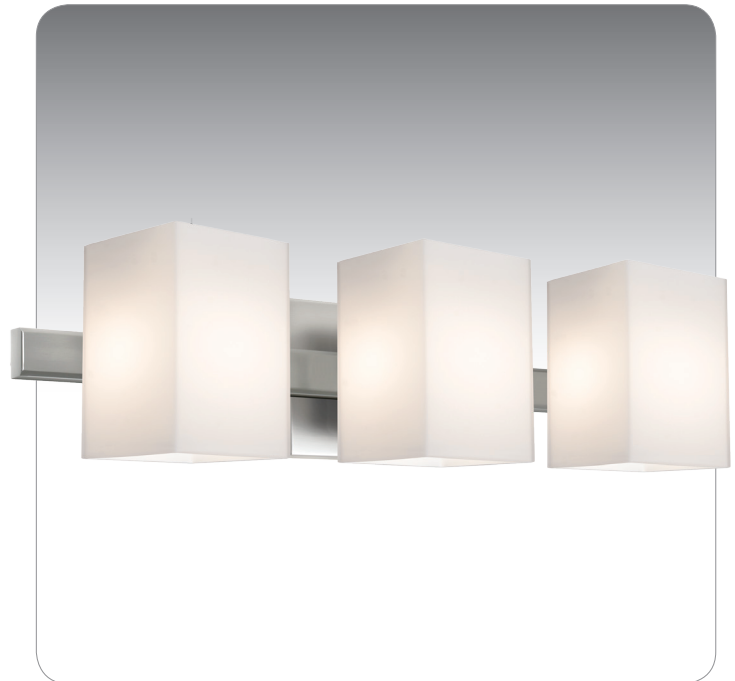

OPAL MATTE

1SW-TITO07-SN
5" L x 5.25" H x 5" D

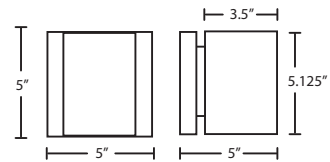

2SW-TITO07-SN
14.625" L x 5.125" H x 5" D



3SW-TITO07-SN
22.5" L x 5.125" H x 5" D



4SW-TITO07-SN
30.375" L x 5.125" H x 5" D



ORDERING:

FIXTURE	GLASS OPTIONS	LAMP OPTIONS	METAL FINISH
1SW 1 Lt. Sconce	TIT007 Opal Matte	(blank) 60W G9 Hal	CR Chrome
2SW 2 Lt. Vanity		LED 5W LED	SN Satin Nickel
3SW 3 Lt. Vanity			
4SW 4 Lt. Vanity			

Ex. 2WS-TITO07-SN
Tito Vanity, Opal Matte Shade,
Satin Nickel Finish

Project Information:

All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 12/18